



INDUSTRIES LTD.

'PUROPAL' H₂O DEMINERALIZERS



**Optional conductivity
and flow meter**



The 'PUROPAL' disposable cartridges are ideal for demineralizing fill water for closed loop hydronic systems. The quality of water, especially when mixed with anti-freeze (glycol), can have an impact on system performance. Marginal water quality can lead to scaling, sediment deposits, accumulation of sludge, and increased corrosion rates.

FEATURES and BENEFITS

- *Demineralized water meets the strict water quality requirements from boiler and glycol manufacturers*
- *Removes all the aggressive salts such as chlorides, sulphates, and nitrates which specifically attack metals like stainless steel, copper, and aluminum*
- *Removes scale producing ions like calcium and magnesium that damage components and block heat transfer*
- *Lowers electrical conductivity, which reduces corrosion*
- *The Puropal-300 media changes from blue to beige when spent*
- *An economical and convenient alternative to pre-blended glycol*

AXIOM INDUSTRIES LIMITED 2615 WENTZ AVENUE SASKATOON, SK S7K 5J1
TOLL FREE : (877) 651-1815 PHONE : (306) 651-1815 FAX : (306) 242-3373

www.axiomind.com




PUROPAL H₂O demineralizer TECHNICAL INFORMATION

Application: The closed loop system is filled using local domestic water which has been run through the Puropal cartridge. In doing so the water is demineralized, meeting fill water specifications of glycol and boiler manufacturers. It is also possible to demineralize an existing “water only” system by circulating the system water through a Puropal demineralizing cartridge. Puropal provides a great advantage because neither meters nor special knowledge are required for water treatment.

Capacity: The graph below shows that the capacity of the demineralizing cartridge depends on the total hardness of the domestic water. Example: With a hardness of 11.7 gpg (200 ppm), the Puropal-300 provides 92 gal (350 L) of completely demineralized water, Puropal-500 provides 132 gal (500 L) and Puropal-1000 provides 264 gal (1000 L).

Capacity: volume of demineralized water

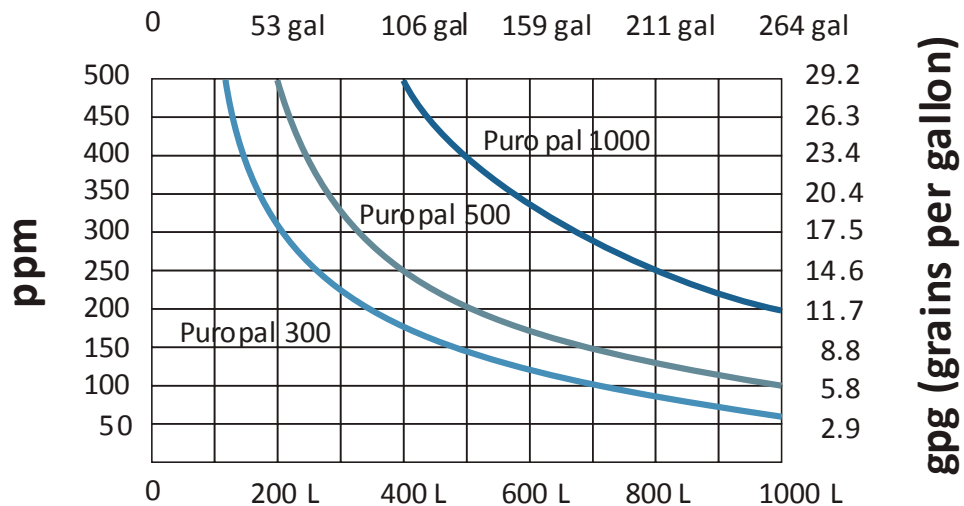

SPECIFICATION

The H₂O demineralizer shall be AXIOM INDUSTRIES LTD. model PUROPAL-_____. System shall include disposable cartridge with demineralizing ions. Max. pressure 58 psi (400 kPa) at 140 °F (60 °C).

ACCESSORIES

- PUROPAL-Meter** – Flow and conductivity meter
- PUROPAL-Hose Kit**– Hose kit

LIMITED WARRANTY

The Axiom PUROPAL H₂O demineralizer is warranted against defects in materials and workmanship for one year.

Project _____ Location _____
 Consultant _____ Contractor _____
 Unit Tag _____ Sales Agent _____