



UP 50-44F

UP 50-44F

Closed Systems, 60 Hz

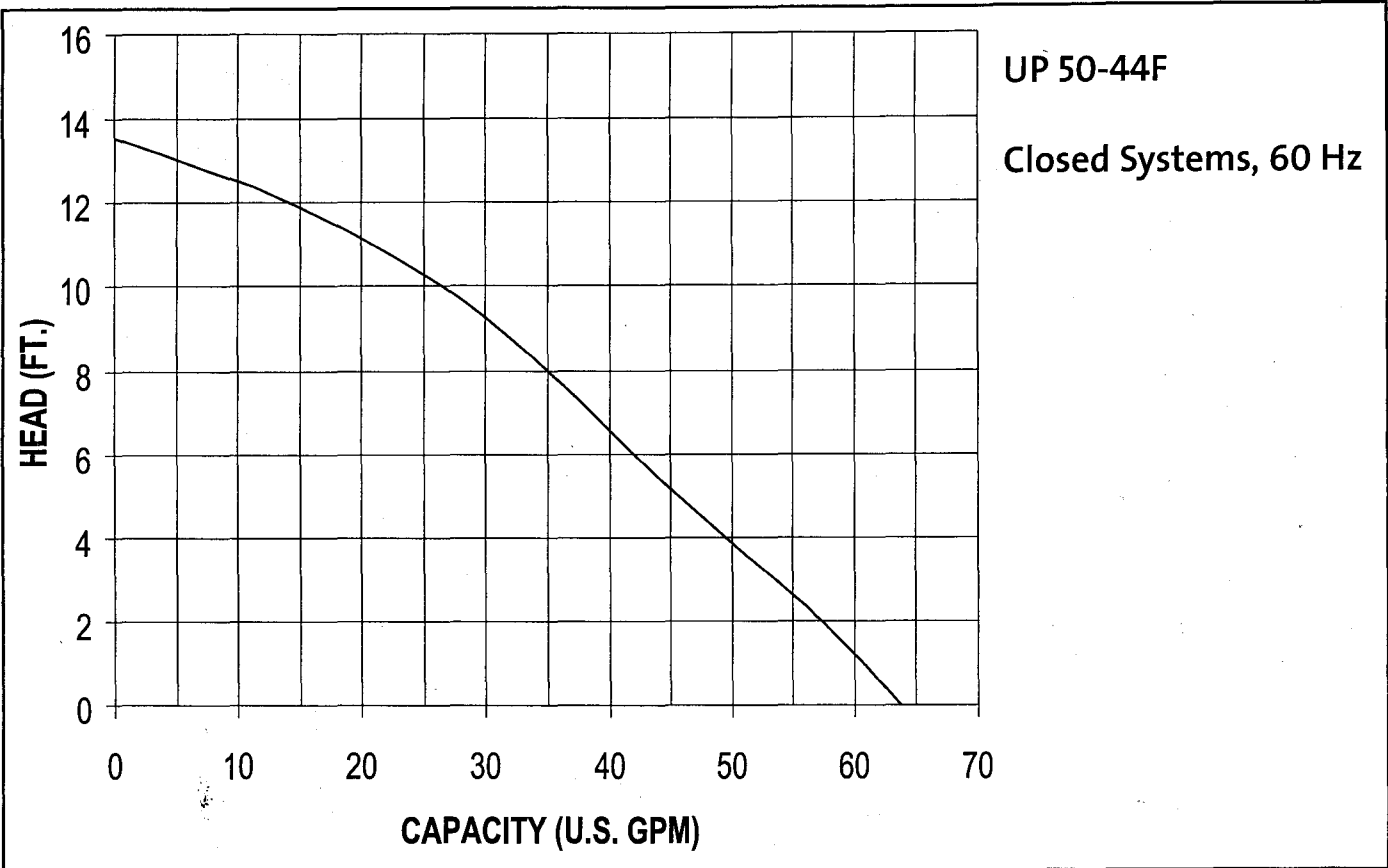

Flow range: 0 - 64 U.S. GPM
 Head range: 0 - 13.5 FEET
 Motors: 2 Pole, Single Phase
 Maximum fluid temperature: 230°F (110°C)
 Min. fluid temperature: 32°F (0°C)
 Maximum working pressure: 145 PSI

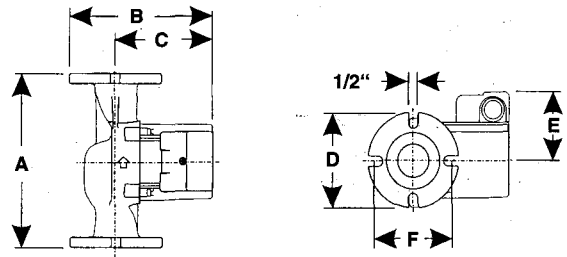

MODEL	VOLTS	AMPS	WATTS	HP	CAPACITOR
UP50-44F	115	2.15	215	1/6	10mF
	230	1.07	220	1/6	2.5mF/400V

Model Type	A	B	C	D	E	F	Connection Type and Size	Shipping Wt. (Lbs.)
UP50-44F	8 1/2	7 1/2	5 1/16	4 7/8	3 1/2	4 1/16	Flange - (2) 1/2" Dia. Bolt Holes	15 1/2